

HOOK-UP CONNECTION

METERED UNIT

1, 2 & 3way, Lockable Sockets
16A or 32A



ROLEC
Caravan Hook-Ups



Unit shown: Hook-Up Connection Unit
Metered
1way Lockable Socket

Available in 1, 2 and 3way options, this cost effective and hard-wearing hook-up unit is suitable for all caravan and holiday parks. With its IP44 sockets, complete with lockable capabilities, this hook-up unit ensures a safe and secure electrical connection(s).

Equipped with MID approved kWh meter(s) which can be visually read through meter viewing windows/flaps located on the front of the units.

Complete with an IP55 weatherproof thermoplastic enclosure, built-in cable terminals and switchgear access flaps with an optional galvanised ground mounting post.

PRODUCT FEATURES


- IP44 lockable sockets
- Available in 16A or 32A versions
- **MID** compliant miniature kWh metering
- Built-in overload and 30mA fault current protection
- IP55 weatherproof thermoplastic enclosure
- Built-in cable terminals
- Switchgear access flap
- Optional galvanised mounting post
- Easy to install & maintain
- IP Rated & UV stabilised
- Fire retardant



IP44 Lockable
Sockets



For Touring/Static
Caravans & Camp Sites



Miniature kWh
Metering



IP Rated &
UV Stabilised



Strong
& Durable



CE
Certified


SPECIFICATIONS

PRODUCT OVERVIEW


Product Code	Socket(s)	Output	Fault Protection	Metering	Enclosure
LSAB0010	1 Way Lockable 	1x 16A	1x 16A 30mA RCBO	1x 45A kWh Meter	RE113F
LSAB0030		1x 32A	1x 32A 30mA RCBO		
LSAC0010	2 Way Lockable 	2x 16A	2x 16A 30mA RCBOs	2x 45A kWh Meters	RE115F
LSAC0020		2x 32A	2x 32A 30mA RCBOs		
LSAH0090	3 Way Lockable 	3x 16A	3x 16A 30mA RCBOs	3x 45A kWh Meters	RE115F

TECHNICAL DATA

Input Voltage	220 to 250 VAC / 50 Hz (Single Phase)
Cable Terminals	3x50mm (Others sizes Available on Request)
Earthing	Brass Earth Plate & Earth Terminals
Certifications & Compliances 	Enclosure - EN 60670-1, EN 60670-22
	Flame Retardance - IEC 60695-2-11:2014
	Low Voltage Directive (LVD) - 2014/35/EU
	Environmental Protection - IP55 Enclosure, IP44 Socket(s)
	Weather resistance - BS EN 60529:1992+A2:2013
	Socket(s) - BS EN 60309-2:1999+A2:2012
	Cable - BS 6004
	Metering - EN50470-1, EN50470-3, 2004/22/EC, MID B+D Certified
	RoHS - 2011/65/EU
	REACH - 1907/2006
Dimensions	RE113F - 190mm x 250mm x 110mm (W x H x D) RE115F - 230mm x 310mm x 110mm (W x H x D)
Materials	Thermoplastic Enclosure
Operating Temperature	-30°C to +60°C
Colour	Grey

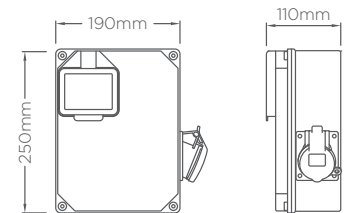

RE113F Enclosure

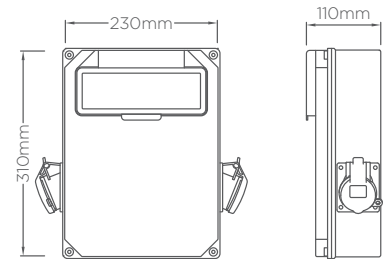

RE115F Enclosure

OPTIONS & ACCESSORIES

- Galvanised ground mounting post
- Photocell kit available to control park lighting



Images are for marketing purposes only and are not contractual © 2020



Head office contact:
t: +44 (0) 1205 724754
f: +44 (0) 1205 724876
rolec@rolecserv.co.uk

Rolec Services Ltd
Ralphs Lane, Frampton West
Boston, Lincolnshire
UK. PE20 1QU

 @RolecCaravan
 /Rolec-Services
www.rolecserv.com

LSACHUMD-V01-R1 Hook-Up Connection Metered - Data sheet